

**STEINFURTH®**

# CARBOFRESH®

## ...perfect CO<sub>2</sub> dosage in wine

Carbon dioxide is known as one of the major refreshing and taste impacting ingredients of wine (beer or soft drinks).

Effective adjustment of the carbonation level (carbonation for white and rose wines, or CO<sub>2</sub> reduction for red wines) is an important process step in adjustment & production of the optimal wine quality.



### Quality improvement in white and rosé wines

The unique incorporation of fine carbon dioxide bubbles lends freshness and lightness to the flavour and body of wines. Even with dense and voluminous wines, it imparts aromas. The subtle carbon dioxide bubbles make white and rosé wines fresher, livelier and aromatic.

### De-carbonation and CO<sub>2</sub> adjustment in red wines

Excess and disturbing carbon dioxide can be removed from red wines. Instead of charging with carbon dioxide, plain nitrogen is used. The Carbo-fresh® processor makes it easy to adjust the optimal content of carbon dioxide in wines. The wine is simply passed through the system and conveyed unpressurized into the tank.


The device works purely pneumatically and doesn't need any electric energy supply. The desired carbon dioxide concentration is set directly at the device itself. If product flow drops below a minimum flow rate, the device is automatically deactivated. When the product flow increases, carbonation is activated again.

### BENEFITS:

- Quick return of investment
- Low maintenance requirements
- Accuracy and consistency of product quality
- Easy installation and operation
- No electrical connections or control modules
- High efficiency
- Automatic activation / deactivation

### OPERATION:

A feed pump (not included) presses the beverage through a built-in venturi injector, where the desired amount of CO<sub>2</sub> is added. The CO<sub>2</sub> bubbles dissolve in the downstream mixing stage.

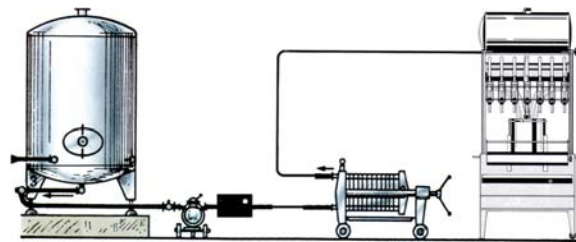

### TECHNICAL DATA:

Flow rate:	1.000 - 30.000 l/h (depending on injector size)	265 - 7833 gal/h)
CO <sub>2</sub> concentration:	0-1.8 g/l / 0-0.8 vol (continuously variable, temperature-dependent)	
Required feed pump pressure:	≥ 6 bar / 87 PSI	
Maximum operating pressure:	7 bar / 102 PSI	
CO <sub>2</sub> supply pressure:	7 bar / 102 PSI	
Dimensions (LxHxD) in mm:	300 x 160 x 100	
inch:	11.8 x 6.3 x 3.9	
Pressure loss:	approx. 0.7-2.0 bar (10 - 29 psi)	

#### Steinfurth, Inc.

305 Etowah Trace • Suite 102 • Fayetteville, GA 30214  
Phone: (678) 674 1096 • Fax: (678) 674 1097  
e-mail: [info@steinfurth.com](mailto:info@steinfurth.com)  
Internet: [www.steinfurth.com](http://www.steinfurth.com)

#### Steinfurth Mess-Systeme GmbH (Germany)

Bonifaciusring 15 • D-45309 Essen  
Phone: +49 (201) 85517-0 • Fax: +49 (201) 85517-20  
e-mail: [info@steinfurth.de](mailto:info@steinfurth.de)  
Internet: [www.steinfurth.de](http://www.steinfurth.de)